

Portable Utility Lights

44

HOW TO ORDER

1. Select your Light Head Source (LED or Quartz)
2. Select the # of Light Heads (one or two)
3. Select your Base or Mount

All items shipped in individual cartons.

Styles of Light Sources



LED-37-1



LED-37-2



QH-2

LED

- Lexan housing with safety tempered glass front lens cover
- Black finish, NEMA 4 rated enclosure with push button on/off switch
- Each shade size is 7-3/4" wide x 10" high x 3-3/4" deep
- 120V, 3,680-Lumens, 3,000K, 30,000+ hour lamp life
- 15' long, 18/3 SJT, 120V cordset with NEMA 15-5 grounded plug
- Compliant with RoHS 2 Directive (2011/65/EU), that of which includes the application exemptions outlined in Annex III of the directive. ETL C/US Listed.



Quartz Halogen

- QH model includes (2) 500 Watt quartz halogen bulb and weatherproof die cast aluminum light heads with impact resistant lens
- Black finish, weatherproof aluminum die-cast light heads
- Includes: On/Off switch, aiming handle, adjustment knob & steel yoke
- Each shade size is 9" wide x 7-1/4" high x 9-3/4" deep
- 120V, 3,680-Lumens, 3,000K, 30,000+ hour lamp life
- 15' long, 18/3 SJT, 120V cordset with NEMA 15-5 grounded plug
- ETL C/US listed for indoor & semi-protected outdoor use

5 Types of Bases and Mounts

Pedestal Base



- 16 gauge round steel tube construction
- Height adjustable from 5'-6" to 8'-6" high
- 18" heavy duty steel base



Cart Base

- 16 gauge round steel tube construction
- Height adjustable from 5' to 8' high
- 10" diameter wheels

Floor Base



- 12 gauge steel base
- Handle included
- Base covers 16" diameter area

Clamp-On Mount



- Clamp secures light head to most surfaces up to 3"

Magnet Mount



- 210 lb. magnetic strength
- 1/4" steel arm
- Extends 6" from mounting surface

Standard Models

Complete Unit Examples:



Light Source:
Model #: **LED-37-2**
plus
Base Model #: **CRT**

MFG CATALOG NUMBER	MFG MODEL NUMBER	TYPE	DESCRIPTION	TOTAL MAX WATTS	NUMBER OF LIGHT HEADS	WT. (LBS)	LIST
04885402	LED-37-1	LIGHT HEAD SOURCE	LED	37	1	6	417
04885302	LED-37-2			74	2	10	844
04803302	QH-2	MOUNT/ BASE	QUARTZ HALOGEN	1000	2	10	267
04802702	PED		PEDESTAL	---	---	31	349
04802802	CRT		CART	---	---	27	303
04802602	FLR		FLOOR	---	---	4	98
04802402	CLP		CLAMP	---	---	2	54
04802502	MAG		MAGNET	---	---	3	65



M-LED-37-1



F-LED-37-1


Ordering Notes:

- All items shipped in individual cartons.
- Models FLR, CLP & MAG will only support 1-Light Head.
- LED37-1 cannot be used with model CLP.

WARNING: This product can expose you to chemicals including nickel which is known to the State of California to cause cancer, and chromium, which is known to the State of California to cause birth defects and/or reproductive harm. For more information go to www.P65Warnings.ca.gov.

Heavy Duty Portable Utility Lights

45

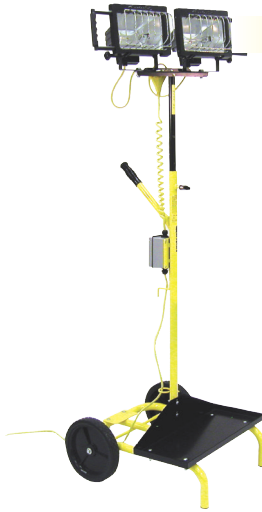

PUL-1000Q-CD

Quartz Halogen Light Heads

- (2) 500 Watt weatherproof die cast Aluminum light heads with 15' long, 3-conductor cord, and plug
- Quartz halogen lamps
- Impact resistant lens
- On-Off switch
- OSHA approved wire guards and bulb included with each light head
- Made in U.S.A. with domestic and foreign components.

WARNING: This product can expose you to chemicals including nickel which is known to the State of California to cause cancer, and chromium, which is known to the State of California to cause birth defects and/or reproductive harm. For more information go to www.P65Warnings.ca.gov.



PUL-1000Q-TC

Cart Light Stand With GFCI Features

- Upright adjust from 5' to 8' high
- 10" diameter rubber wheels
- 15' all-weather, water and oil resistant SJTW 18/3 cordset and molded NEMA 5-15 plug
- Weatherproof electrical box with a 15 Amp GFCI duplex receptacle

Tripod Light Stand Features

- Square 12 gauge steel tubing construction
- Adjustable legs fold up for storage, fold flat for sand bagging or can be set and locked at 6", 12", 18", or 24" ground clearances
- Height adjustable from 5' to 11' high
- Safety stop mechanism, at full extension, prevents the mast from being pulled out of the base
- 15' all-weather, water and oil resistant SJTW 18/3 cordset and molded NEMA 5-15 plug

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	BASE TYPE	BULBS	WATTS	VOLTS	MAX LUMENS	AVE. BULB LIFE (HRS)	WT. (LBS)	LIST
04467802	PUL-1000Q-CD	CART	500W Quartz Halogen	1000	120	22,000	2,000	50	847
04468302	PUL-1000Q-TC	TRIPOD						41	895
04843102	TRI-HD	Heavy Duty Tri-Pod Sold Separately. Will Accommodate all TPI Light Heads.							595

Commercial Duty Portable Utility Lights

CL 300 (Clamp on Model)

Features

- Ceramic socket will accept incandescent bulbs A-19, R-40 or PAR bulbs up to 300 Watt. Fixture will also accept infrared heat lamps up to 250 Watts
- LED bulb included
- 8' long - 18/3 SPT cordset with NEMA 5-15 plug
- Imported to TPI specifications.



WARNING: This product can expose you to chemicals including nickel which is known to the State of California to cause cancer, and chromium, which is known to the State of California to cause birth defects and/or reproductive harm. For more information go to www.P65Warnings.ca.gov.

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	BASE TYPE	DESCRIPTION	MAX. WATTS	VOLTS	MAX LUMENS	AVE. BULB LIFE HOURS	WT. (LBS)	LIST
02804900	CL-300	CLIP-ON	LED	9	120	800	25,000	3	89

CL-300 is shipped in ONE carton. LED bulb included

Loading Dock Lights - Shipped in 1-Carton

46

Light Head Features

- Chip resistant safety yellow & black powder coating finish for high visibility and durability
- 5' long 18/3 SJT, 120V cordset with NEMA 15-5 grounded plug
- On/Off switch & wire guard included on each light head
- 1-1/2" square, 11-gauge, steel tubing
- 3" x 5" x 3/16" mounting plate attached with (4) 3/8" bolts (not supplied)
- VA & DKLED models have vertical adjustment bracket allowing outer arm to adjust from 300° horizontally and 210° vertically
- All light heads will swivel 300°
- VA Models include an embedded electrical outlet for direct plug connection from the light head fixture and shipped fully-assembled
- DKLED units contain a die-cast aluminum light head with adjustable knobs, built-in on/off switch, and maintains an IP65 rating suitable for wet locations
- DKLED units use a 20° custom beam angle and 12 individual high-intensity LED emitters generating a neutral white color; with a CCT measuring 4,000K DKLED units provide a minimum life of 50,000 hours and offers a 5-year warranty, including CE & RoHS Certificates
- Designed for loading dock and work station environments
- ETL C/US Listed for indoor applications only, except QH models are semi-protected outdoor and DKLED models have IP65 rating suitable for wet location areas



WARNING: This product can expose you to chemicals including nickel which is known to the State of California to cause cancer, and chromium, which is known to the State of California to cause birth defects and/or reproductive harm. For more information go to www.P65Warnings.ca.gov.

Standard Models (120V)

MFG CATALOG NUMBER	MFG MODEL NUMBER	ARM LENGTH	# OF ARMS	MAX WATTS	WT. (LBS)	LIST
NO BULB						
04466502	DKL-40VA-A	40"	2	Maximum 300	14	247
04466602	DKL-60VA-A	60"	2		17	296
03854001	DKL-25-FLX	25"	1		17	261
LED - 3,300 Lumens, 4,000K CCT, 50,000-hour Avg. Bulb Life						
04922802	DKLED-40-30W	40"	2	30	13	370
04922902	DKLED-42-30W	42"	3		14	390

LED 30-Watt



Loading Dock Lights - Modular (shipped in multiple cartons)

Modular Lights



DKL-INC



DKL-LED37



DKL-QH



DKL-LED-30W-SP



DKLED-30W-WP

Features

- 14" long, 18/3 conductor cord plugs into electrical junction box on arm
- On/Off switch & wire guard included with each light head
- Bulb included with all light heads except DKL-INC
- Imported to TPI specifications.
- DKL-LED-37 is compliant with ROHS 2 Directive (2011/65/EU), that of which includes the application exemptions outlined in Annex III of the directive.



WARNING: This product can expose you to chemicals including nickel which is known to the State of California to cause cancer, and chromium, which is known to the State of California to cause birth defects and/or reproductive harm. For more information go to www.P65Warnings.ca.gov.


Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	LIGHT HEAD TYPE	MAX WATTS	MAX LUMENS	AVE. BULB LIFE (HRS)	WT. (LBS)	LIST
04465602	DKL-INC	No Bulb Included	300	3,700	2,000	5	98
04465702	DKL-QH	Quartz Halogen	500	11,000	2,000	6	147
04881302	DKL-LED-37	LED	37	2,373	>30,000	5	393
04923002	DKLED-30W-WP	LED w/ Pin Connector Plug	30	3,300	50,000	7	280
04923102	DKLED-30W-SP	LED w/ Grounded Plug	30	3,300	50,000	7	280

Mounting Arms



DKL-40VA-ARM



60-LDA



24-LDA



The outer arm on 40VA & 60VA arms will swing 300° in horizontal plane & 210° in vertical plane

Features

- 1 1/2" square, 11 gauge, steel tubing
- 3" x 5" x 3/16" mounting plate attaches with (4) 3/8" bolts
- 5' long, 18/3 SJTW conductor cord and NEMA 5-15 grounded plug
- Made in U.S.A.

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	ARM LENGTH	TOTAL # OF ARMS	WT. (LBS)	LIST
04465402	DKL-40VA-ARM	40"	2	18	153
04465502	DKL-60VA-ARM	60"	2	24	194
04465302	24-LDA	24"	1	11	120
04466102	40-LDA**	40"	3	18	207
04466202	60-LDA**	60"	3	24	240

**Indicates heavy duty dock arms (Horizontal swing only, no vertical movement)

Loading Dock Arm Fan



WARNING: This product can expose you to chemicals including nickel which is known to the State of California to cause cancer, and chromium, which is known to the State of California to cause birth defects and/or reproductive harm. For more information go to www.P65Warnings.ca.gov.

Features

- 18" high velocity circulator, with 3 speed, 1/8 HP, 115V, 1 phase permanently lubricated, totally enclosed, PSC motor
- Modular fan plugs into electrical outlet on arm
- Coated steel guards and aluminum blades
- Imported to TPI specifications

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	CFM			VELOCITY PROFILE MAX. CFM	AMPS HIGH	WT. (LBS)	LIST
		HIGH	MED	LOW				
07971802	LDF-18-TE	1800	1500	1300	2900	2.2	20	238

Note: Must be used with LDA (Heavy Duty) mounting arms

Machine Tool Lights

48

Water Resistant Fluorescent or LED Tube Lights



WARNING: This product can expose you to chemicals including nickel which is known to the State of California to cause cancer, and chromium, which is known to the State of California to cause birth defects and/or reproductive harm. For more information go to www.P65Warnings.ca.gov.

Features

- ETL C/US Listed for NEMA Type 13 applications - oil / water / coolant spray areas (not submersible) and dusty atmospheres
- Available with a durable, lightweight, economical, shatter resistant polycarbonate tube housing
- Model 21-TLP-IB-C includes a remote ballast, cordset, and on/off switch
- Stainless steel mounting hardware and fluorescent or LED bulb are included
- 8' long, 18/3 SJTOW cord with NEMA 5-15 plug on models with cords
- EOB units with internal ballast are factory wired for 120V w/ 8' long cordset. Units can be field converted for direct wiring for 90V to 277V. Terminal block provided for easy wire installation.
- Made in U.S.A.

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	DESCRIPTION	WATTS	VOLTS	LUMENS	OVERALL LENGTH	TUBE MATERIAL	BALLAST INCLUDED	WT. (LBS)	LIST
02823200	21-TLP-IB-C	REMOTE BALLAST WITH CORDSET	36	120V	2900	21"	Polycarbonate	Yes	10	641
04829502	29-TLP-EOB-C	INTERNAL BALLAST WITH CORDSET	36	90 to 277V	2900	29"	Polycarbonate	Yes	7	542
04843402	29-TLP-A*	REMOTE BALLAST	50	120V	4300	29"	Polycarbonate	Yes	7	575
04829302	23-TLP-24VDC**	INTERNAL BALLAST	18	24VDC***	1250	23"	Polycarbonate	Yes	6	503
04891802	21-LEDTLP-120-16	LED WITH NO BALLAST	16	120V	1200	21"	Polycarbonate	No	3.4	575
04891902	29-LEDTLP-120-26	LED WITH NO BALLAST	26	120V	2800	29"	Polycarbonate	No	2.7	641

* Not ETL Listed / ** Not ETL Listed Low Voltage / *** Includes 2 ft. lead wires

Notes:

LED lights comply with part 15 of the FCC rule.

LED Machine Tool Light 29" CFL equivalent is 40 watts.

LED Machine Tool Light 21" CFL equivalent is 36 watts.

Accessories - Replacement Lamps

MFG CATALOG NUMBER	MFG MODEL NUMBER	DESCRIPTION	USED WITH	WT. (LBS)	LIST
3103300	TL-RB-18	Fluorescent Replacement Bulb, 18W, PL-L	All 18 Watt Models	1	76
3100800	TL-RB-36	Fluorescent Replacement Bulb, 36W, PL-L	All 36 Watt Models	1	81
3108200	TL-RB-50	Fluorescent Replacement Bulb, 50W, PL-L	All 50 & 100 Watt Models	1	90

Heavy Duty Machine Tool Lights

120V LED - Disc & Collar Task Lights

49



66-VCX-701B

WARNING: This product can expose you to chemicals including nickel which is known to the State of California to cause cancer, and chromium, which is known to the State of California to cause birth defects and/or reproductive harm. For more information go to www.P65Warnings.ca.gov.

Features

- Patented disc and collar swivel joints with adjustable bar knobs for securing arms into a variety of positions
- Shades constructed of a 22 Gauge steel and arms made of 5/8" steel tubing, with reach from 29" to 38"
- Charcoal gray powder coated finish
- Horizontal or vertical bolt down mounting bracket
- 10 amp rocker type on-off switch and lamp socket
- Includes an 8' 18/3 SJTO Cordset with NEMA 5-15 molded grounded plug
- 120V, 11-watt LED bulb included, 800-Lumens, 2700K CCT, 25,000-hour Avg. Bulb Life, A-19 screw base
- LED bulb included
- Made in U.S.A.

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	BULB TYPE	BULB DESCRIPTION	WATTS	MAX LUMENS	AVE. BULB LIFE (HRS)	OVER-ALL REACH	WT. (LBS)	LIST
03813101	66-VCX-701B	LED	2700K, 800-Lumens	11	800	25,000	38"	6	279

Note: 66-VCX-701B is not included in the ETL C/US List

120V LED - Flexible Arm Machine Tool Light



12-R-M-3

WARNING: This product can expose you to chemicals including nickel which is known to the State of California to cause cancer, and chromium, which is known to the State of California to cause birth defects and/or reproductive harm. For more information go to www.P65Warnings.ca.gov.



Features

- 12" chrome plated flexible arm
- 3-1/2" magnet base
- Aluminum shade with black finish and white interior finish for maximum light performance
- On/Off turn knob located on the top of the shade
- LED 8-watt, 540-lumens, 4000K, bulb included
- 120V, 8' long 18/3 black cordset with molded plug
- Shipped fully assembled

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	BULB	BASE	MAX LUMENS	OVER-ALL REACH	WT. (LBS)	LIST
04423002	12-R-M-3	8 Watt	Magnetic Base	540	12"	3	190

120V Fluorescent - Magnifier Task Light



45-MAG-W



WARNING: This product can expose you to chemicals including nickel which is known to the State of California to cause cancer, and chromium, which is known to the State of California to cause birth defects and/or reproductive harm. For more information go to www.P65Warnings.ca.gov.

Features

- 5", 8-diopter (3X power) magnifying clear lens for 200% magnification of an object with a focal length of 5"
- Suspension spring balanced arm assembly allowing up to 45" reach, with finger tighten control knobs to lock arms and shade into position
- 6' cordset with 2 prong polarized plug
- Housing consists of a sturdy white plastic 8 1/2" shade with an on-off rocker switch and glare protection cover located on the top of the shade
- Includes die-cast clamp-on base to attach to a flat surface up to 2 1/2" thick
- Factory installed 22W, 120V, T-9 deluxe cool white circline fluorescent lamp and protective lens
- Imported to TPI specifications

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	MAGNIFICATION POWER	BULB	WATTS	MAX LUMENS	AVE. BULB LIFE (HRS)	OVER-ALL REACH	WT. (LBS)	LIST
04851502	45-MAG-W	3X	22W. Circline	22	1800	16,000	45"	10	289
3120300	MAG-22W	22W., 120V., T-9 deluxe cool white circline replacement lamp						1	39